


# SAL-2PR3

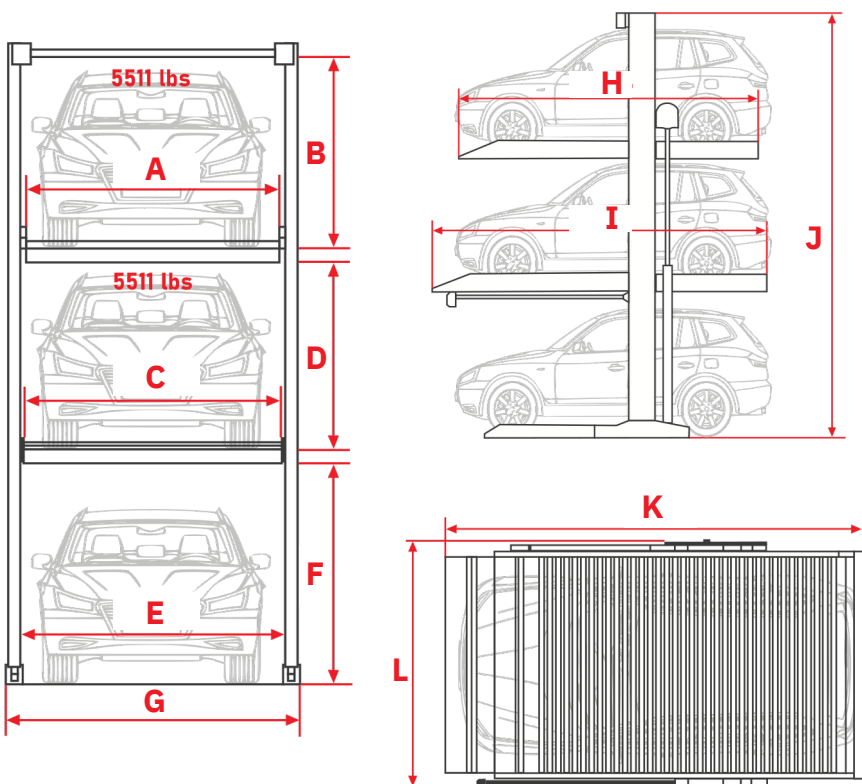

## Features

- Double hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all and the whole structure
- Preamsembled parts for easy installation and relocation
- Safety key switch controller
- Enhanced anti-corrosion galvanized waving plates
- 5-year warranty on parts, 1-year warranty on labor

## Safety System

- Full range anti-fall locks
- Limit switches
- Emergency stop button Photocell sensor
- Lock down button

## APPLICATION SCENARIOS

|                |                                                       |
|----------------|-------------------------------------------------------|
| Vehicle Model  | Sedan or small SUV                                    |
| Foundation     | Slab thickness recommended 11"                        |
| Ceiling Height | Minimum 228 Inches                                    |
| Buildings      | Residential or Storage                                |
| Environment    | Indoor/Outdoor (Outdoor protection devices available) |

## Model

## SAL-2PR3

### Lifting Capacity

5,511 lbs (upper)  
5,511 lbs (middle)

**A - Top Level Width** 91"

**B - Top Level Height** 71"

**C - Mid Level Width** 93"

**D - Mid Level Height** 67"

**E - Bottom Level Width** 95"

**F - Bottom Level Height** 79"

**G - Base Width** 105"

**H - Top Vehicle Length** 142"

**I - Mid Vehicle Length** 169"

**J - Overall Height** 232"

**K - Overall Length** 172"

**L - Overall Depth** 105"

**Vehicle Height** Up to 78 3/4"

**Vehicle Width** 84"

**Vehicle Length** 196"

**Control Box** Integrated modules for simple wiring

**Power Unit** 3.0 kW Hydraulic

**Electrical Requirements** 208-240V, 1-3 phase

**Parking Time** 45-55 seconds

**Most parameters can be customized based on your requirements.**