


SAL-4P3

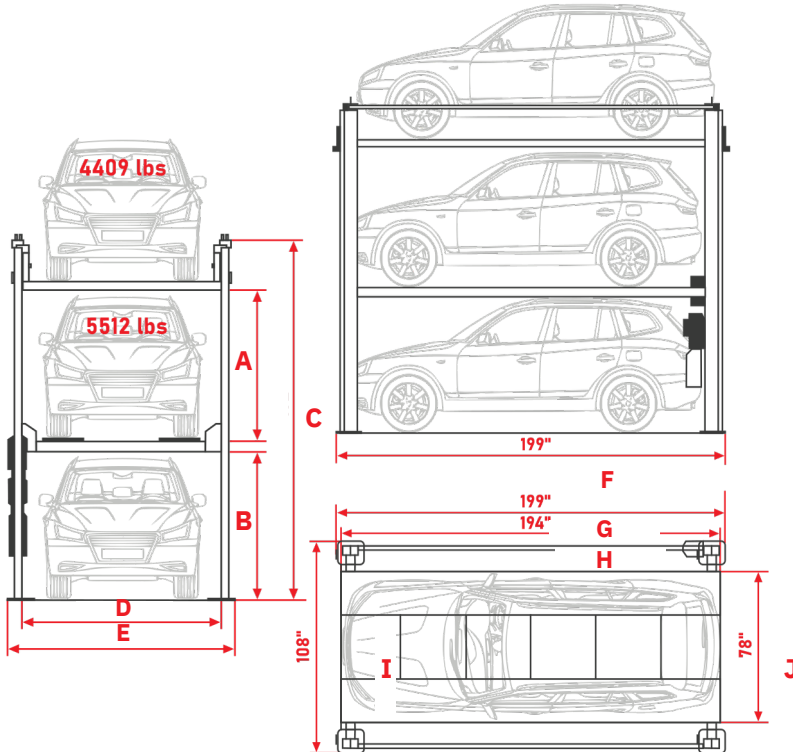

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finish
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor
- Three vehicles parked at the same time

Safety System

Full range anti-fall locks
Limit switches
Emergency stop button
Anti-loosening locks

APPLICATION SCENARIOS

Vehicle Model	Sedan, regular SUV
Foundation	Slab thickness recommended 11"
Ceiling Height	216 1/2 Inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model

SAL-4P3

Lifting Capacity

4,409 lbs (upper)
5,512 lbs (middle)

A - Upper Level Vehicle Clearance Height

71"

B - Lower Vehicle Clearance Height

71"

C - Overall lift Height

172"

D - Inner post Width

94"

E - Outer post Width

108"

F - Overall Length (sideview)

199"

G - Overall Length (top view, outer)

199"

H - Overall Length (top view, inner)

194"

I - Overall Width (top view, outer)

108"

J - Usable platform Width (top view)

78"

Vehicle Height

71"

Vehicle Width

84"

Vehicle Length

<196 3/4"

Control Box

Integrated modules for simple wiring

Power Unit

3.0 kW Hydraulic

Electrical requirements 208-240V, 1-3 phase

Parking time

55 seconds

***Most parameters can be customized based on your requirements**