
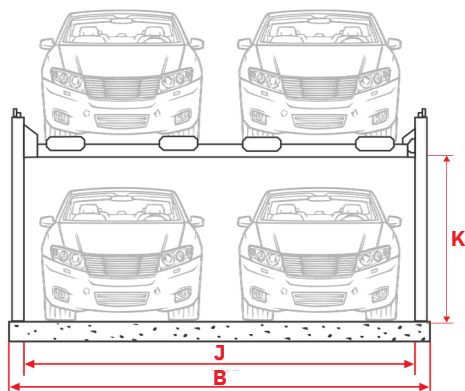
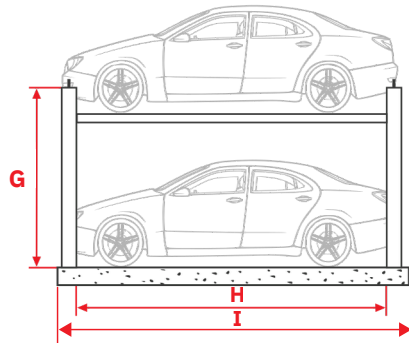


SAL-4PDW

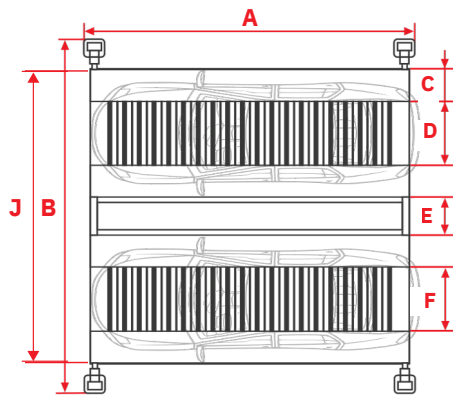

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Enhanced anti-corrosion galvanized waving plates
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor

Safety System

- Full range anti-fall locks
- Limit switches
- Emergency stop button
- Anti-loosening locks

APPLICATION SCENARIOS

Vehicle Model	Sedan
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	149 1/2 Inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model

SAL-4PDW

Lift Capacity	8,818 lbs
Single Vehicle Weight	4,409 lbs
A - Platform Length	197"
B - Overall Width	210"
C - Top Clearance	20"
D - Upper Parking Clearance	37"
E - Deck-to-Deck Spacing	21"
F - Lower Parking Clearance	37"
G - Overall Height	101"
H - Overall Length	177"
I - Vehicle Width	196"
J - Platform Width	Up to 77"
K - Vehicle Height	84"
Overall Vehicle Length	<197"
Control Box	2.2 kW Hydraulic
Power Unit	Integrated modules
Electrical Requirements	208-240V, 1-3 phase

***Most parameters can be customized based on your requirements**

