
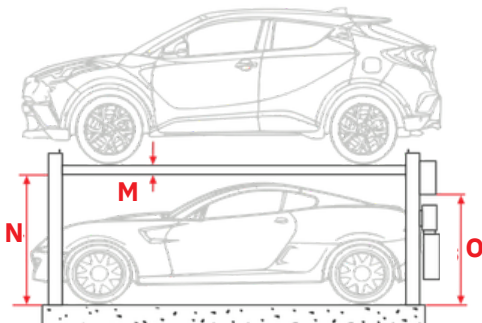
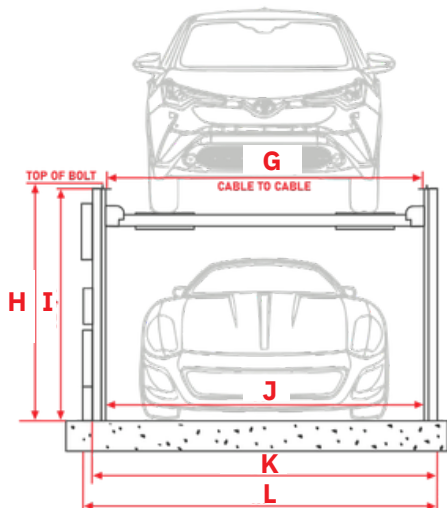


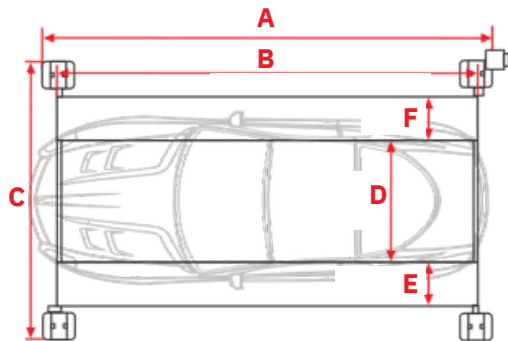

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finish
- Enhanced anti-corrosion galvanized waving plates
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor


Safety System

- 12 Full range anti-fall locks
- Limit switches
- Emergency stop button
- Anti-loosening locks

APPLICATION SCENARIOS	
Vehicle Model	Sedan, SUV, regular pick-up truck
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	138 inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model	SAL-4PSW
Lifting Capacity	7,937 lbs
A - Overall Length	175"
B - Platform Length	165"
C - Overall Width	116"
D - Gap Width (connecting plate)	44 1/2"
E - Runway Width Left	19"
F - Runway Width Right	19"
G - Cable to Cable	97"
H - Height to Top of Bolt	88 1/4"
I - Height of Post	86 3/4"
J - Inside Post to Post Width	99 3/4"
K - Outside to Outside Post	108"
L - Overall Width with Motor	116"
M - Deck Height	4"
N - Maximum Lifting Height	71"
O - Bottom of Control Box	52"
Vehicle Height	Up to 67 1/2"
Vehicle Width	Up to 94"
Vehicle Length	< 197"
Control Box	Integrated modules for simple wiring
Power Unit	1.2 kW Hydraulic
Electrical Requirements	120V, 1 phase
*Most parameters can be customized based on your requirements	

SAL-4PSW

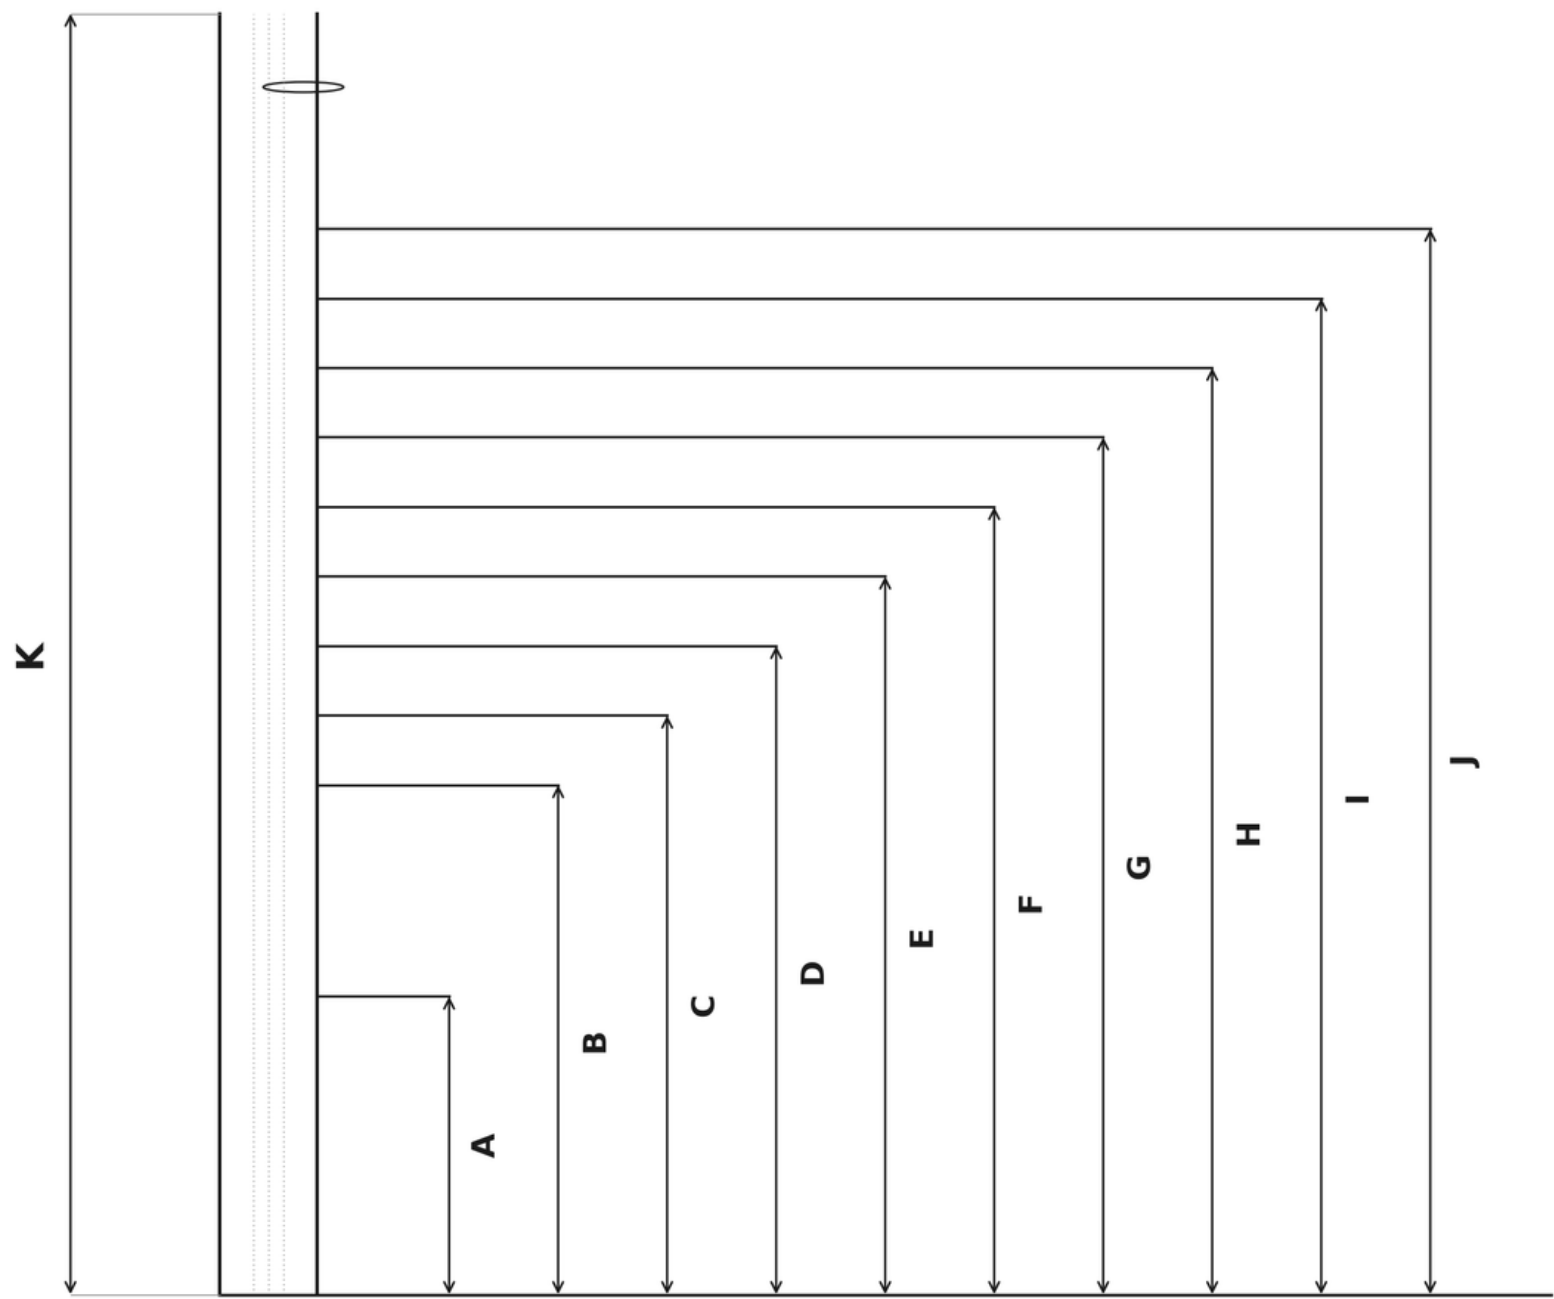

PARKING HEIGHTS

K	87.01 in
J	72.40 in
I	67.68 in
H	62.95 in
G	58.23 in
F	53.50 in
E	48.78 in
D	44.06 in
C	39.33 in
B	34.61 in
A	20.24 in