


SAL-4PTW



APPLICATION SCENARIOS

Vehicle Model	Sedan, SUV, regular pick-up truck
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	138 inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

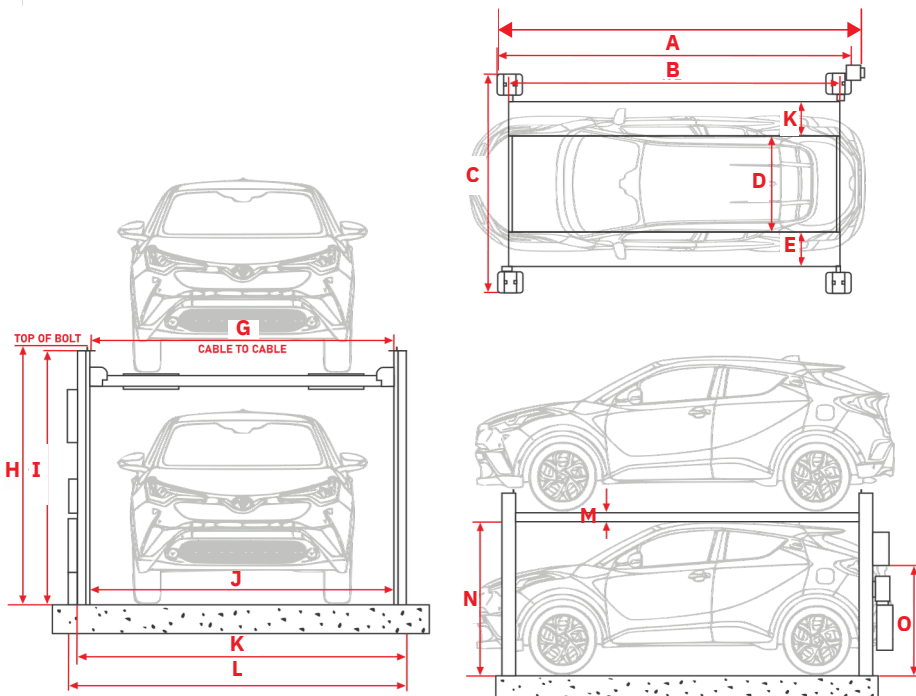

Features


- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finish
- Enhanced anti-corrosion galvanized waving plates
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor

Safety System

- 12 Full range anti-fall locks
- Limit switches
- Emergency stop button
- Anti-loosening locks

Model	SAL-4PTW
Lifting Capacity	8,000 lbs
A - Overall Length	199"
B - Platform Length	192"
C - Overall Width	116"
D - Gap Width (connecting plate)	44 1/2"
E - Runway Width Left	19"
F - Runway Width Right	19"
G - Cable to Cable	97"
H - Height to Top of Bolt	101"
I - Height of Post	99 1/2"
J - Inside Post to Post Width	99"
K - Outside to Outside Post	109"
L - Overall Width with Motor	118"
M - Deck Height	4"
N - Maximum Lifting Height	84"
O - Bottom of Control Box	52"
Vehicle Height	Up to 80 1/2"
Vehicle Width	Up to 94"
Vehicle Length	< 197"
Control Box	Integrated modules for simple wiring
Power Unit	1.2 kW Hydraulic
Electrical Requirements	120V, 1 phase
*Most parameters can be customized based on your requirements	

SAL-4PTW

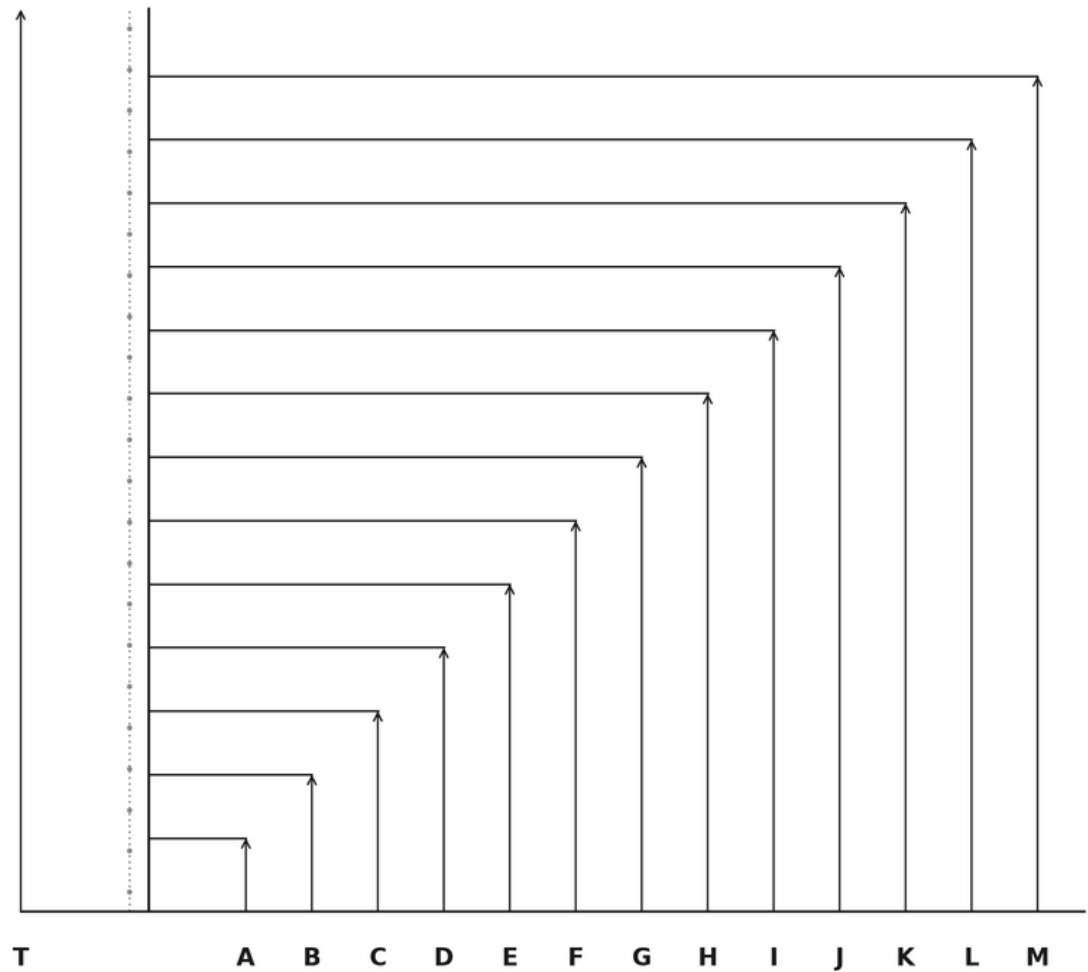

Label	Height (in)
T (total)	98.82
A	20.24
B	32.24
C	36.97
D	10.99
E	41.69
F	46.42
G	51.14
H	55.87
I	60.59
J	65.32
K	70.04
L	79.49
M	84.21