
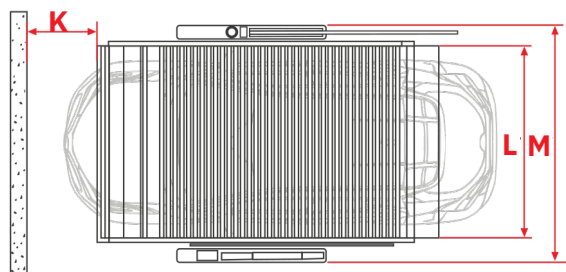
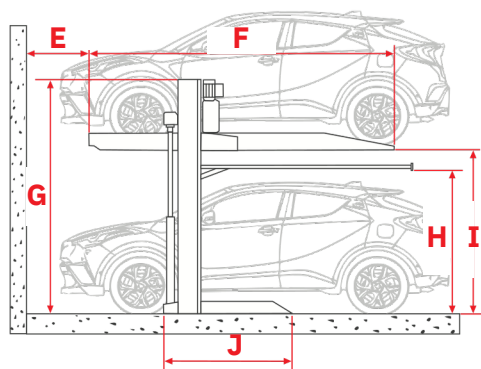
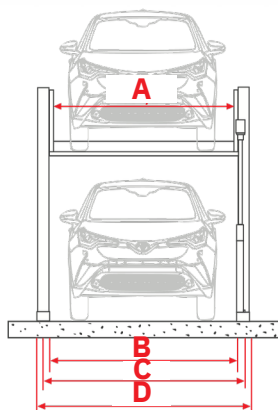


Two Post Short Wide Car Parking Lift

SAL-2PSW

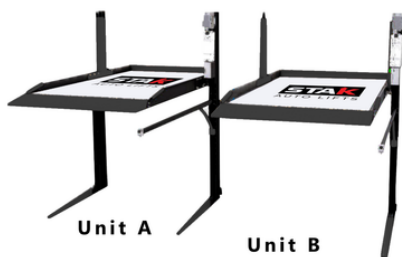

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- Faster lifting speed than other two post lifts
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation
- Effortless disassembly and relocation
- Safety key switch controller
- Hydraulic overload protection
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finishing
- Enhanced anti-corrosion galvanized waving plates
- 5-year warranty on parts, 1-year warranty on labor
- Posts can be shared for multiple parallel lifts

Safety System

- ▶ Full range anti-fall locks
- ▶ Limit switches
- ▶ Emergency stop button
- ▶ Photocell sensor
- ▶ Lock down button

APPLICATION SCENARIOS

Vehicle Model	Sedan, Regular SUV
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	153 1/2 Inches (Sedan+SUV) / 169 1/4 Inches (2 SUVs)
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model

SAL-2PSW

Lifting Capacity

7,055 lbs

A - Vehicle Width

90 1/2"

B - Base Width

94 1/2"

C - Mid Width

101 1/2"

D - Overall Width

107 1/2"

E - Front Post Offset

32"

F - Overall Length (side)

155"

G - Overall height (side)

119"

H - Upper Vehicle Clearance

72"

I - Lower Platform Height

83"

J - Base Length

68"

K - Post Offset (top)

32"

L - Top of Overall Width

90 1/2"

M - Top of Overall Length

107 1/2"

Vehicle Height

Up to 80"

Vehicle Width

Up to 87 1/2"

Vehicle Length

<197"

Control Box

Integrated modules for simple wiring

Power Unit

2.2 kW Hydraulic

Electrical Requirements

120V, 1 phase

Parking Time

45-55 seconds

Most parameters can be customized based on your requirements.