
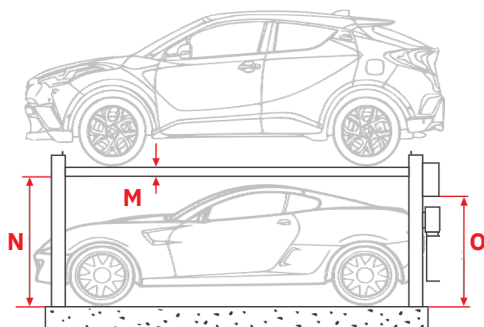
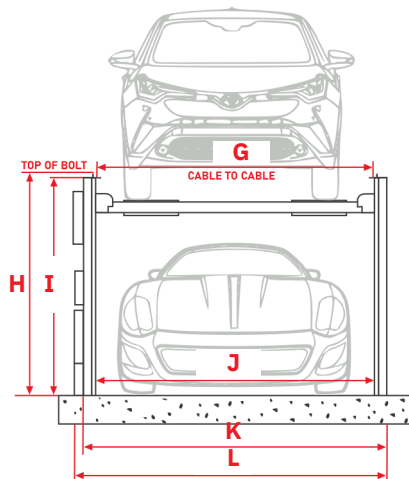


SAL-4PSR

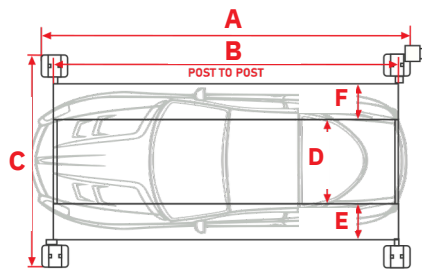

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finish
- Enhanced anti-corrosion galvanized waving plates
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor

Safety System

- 12 Full range anti-fall locks
- Limit switches
- Emergency stop button
- Anti-loosening locks

APPLICATION SCENARIOS

Vehicle Model	Sedan, SUV, regular pick-up truck
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	125 inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model	SAL-4PSR
Lifting Capacity	7,937 lbs
A - Overall Width	175"
B - Post to Post	165"
C - Overall Length	101"
D - Runway Width	37"
E - Corner Overhang (rear)	19"
F - Corner Overhang (front)	19"
G - Cable to Cable	90"
H - Height to Top of Bolt	86 3/4"
I - Height (alt.)	86 1/4"
J - Overall Base Width	92"
K - Overall Length (base)	101"
L - Overall Length (alt.)	104"
M - Post Overhang	4"
N - Overall Side Height	70 3/4"
O - Side Height	51"
Vehicle Height	Up to 67 1/2"
Vehicle Width	Up to 87"
Vehicle Length	< 197"
Control Box	Integrated modules for simple writing
Power Unit	1.2 kW Hydraulic
Electrical Requirements	120V, 1 phase
*Most parameters can be customized based on your requirements	