



APPLICATION SCENARIOS


Vehicle Model	Sedan or small SUV
Foundation	Slab thickness recommended 11"
Ceiling Height	Minimum 228 Inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Features

- Double hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Enhanced anti-corrosion galvanized waving plates
- 5-year warranty on parts, 1-year warranty on labor

Safety System

- Full range anti-fall locks
- Limit switches
- Emergency stop button
- Photocell sensor
- Lock down button

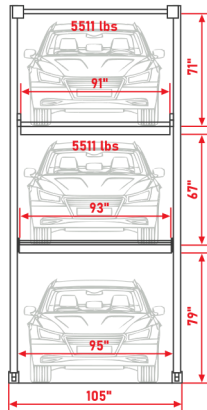

PARAMETERS	
Model	SAL-2PR3
Lifting Capacity	5,511 lbs (upper); 5,511 lbs (middle)
Vehicle Height	Up to 78 3/4"
Vehicle Width	84"
Vehicle Length	196"
Control Box	Integrated modules for simple wiring
Power Unit	3.0 kW Hydraulic
Electrical Requirements	208-240V, 1-3 phase

*Most parameters can be customized based on your requirements.

