




- Features

 - Independent hydraulic system
 - Multiple parking heights
 - 100% Laser Cutting Process for All Parts and the Whole Structure
 - Preassembled Parts for Easy Installation and Relocation
 - Press Button Operation box
 - Hydraulic Overload Protection
 - Anti-Skid Ramp and Platform
 - Anti-Rust Smooth Powder Coating Finishing
 - Enhanced Anti-Corrosion Galvanized Waving Plates
 - Optional: Middle Cover plate, Oil Dip Tray and Tire Protection Plate
 - Customizable Colors
 - Suitable for Auto Repair Shops
 - Lock Release: Electrical
 - Flexibility: Easy to be Separated into Two Individual Lifts
 - 12-month Warranty (Extended Warranty Available)

- Safety System

 - Full Range Anti-Fall Locks
 - Limit Switches
 - Emergency Stop Bottom
 - Anti-Loosening Locks

APPLICATION SCENARIOS	
Vehicle Model	Sedan, SUV, regular Pick-up Truck
Foundation	C25-C30, thickness: > 300 MM
Ceiling Height	220.472 inches
Buildings	Garage, Parking Lot, Car Repairing, Car Dealer, Shopping Mall
Environment	Indoor/Outdoor (Outdoor protection devices available)

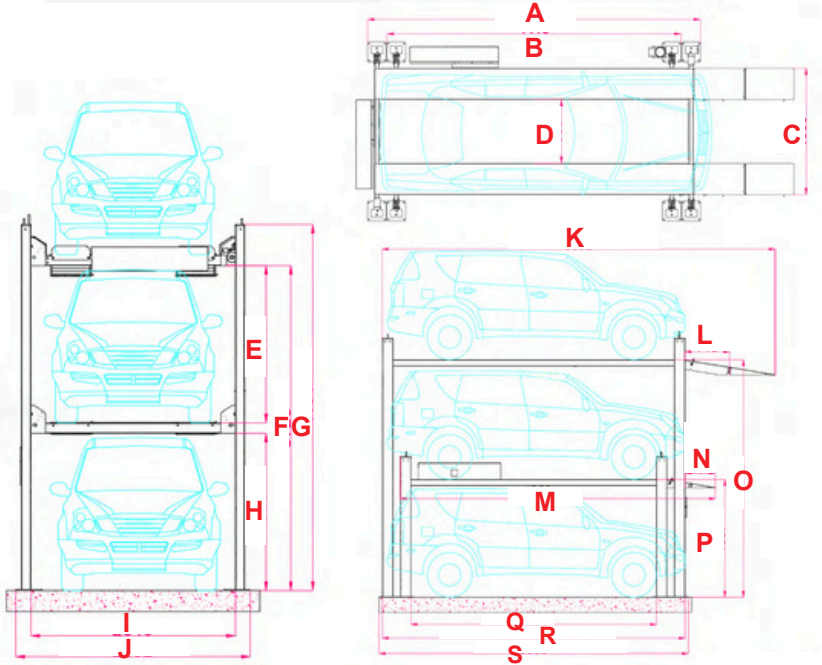

Parameters

Vehicle Height	Up to 61"- 68.8"
Vehicle Width	< 72.8"
Vehicle Length	200.7"
Control Box	Integrated modules for simple wiring
Power Unit	2.2 kW Hydraulic
Electrical Requirements	Voltage: Custom, 1-phase, 3-phase; 50/60Hz
Control Power	24V
Parking Time	50 seconds

*Most parameters can be customized based on your requirements.

Model	SAL-8P3
Lifting Capacity	5952.4 lbs (upper) 7936.6 lbs (middle)
A - Overall Width	16' 4 7/8"
B - Inner Width	14' 6"
C - Depth (top view)	6' 3"
D - Platform Gap	3' 1 3/8"
E - Top Level Height	5' 10 7/8"
F - Mid Level Height	12' 2 1/2"
G - Overall Height (front)	13' 9"
H - Bottom Level Height	5' 10 7/8"
I - Base Width	7' 8 1/8"
J - Max Base Width	8' 9 1/2"
K - Overall Length (side)	20' 10"
L - Ramp Angle Offset	2' 4"
M - Vehicle Length (bottom)	16' 9"
N - Post Offset	1' 7"
O - Overall Height (side)	12' 7 1/4"
P - Mid Section Height	6' 3 1/8"
Q - Base Length	13' 1/8"
R - Mid Base Length	16' 3/4"
S - Max Base Length	16' 4 7/8"