
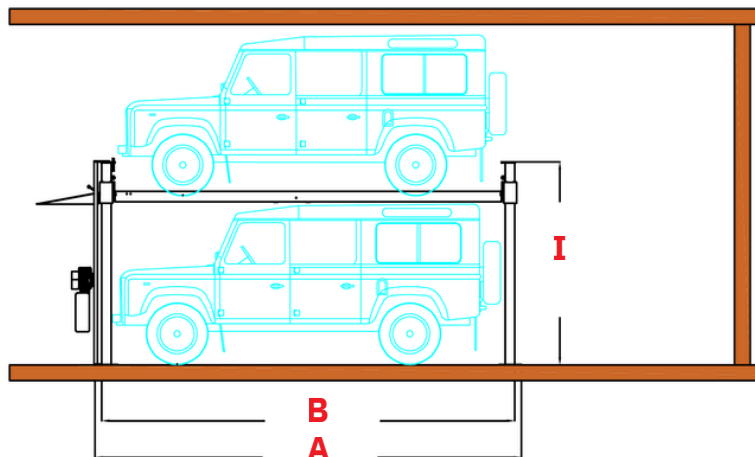
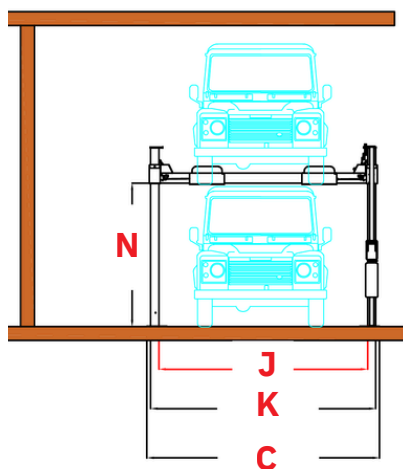


SAL-4PXL

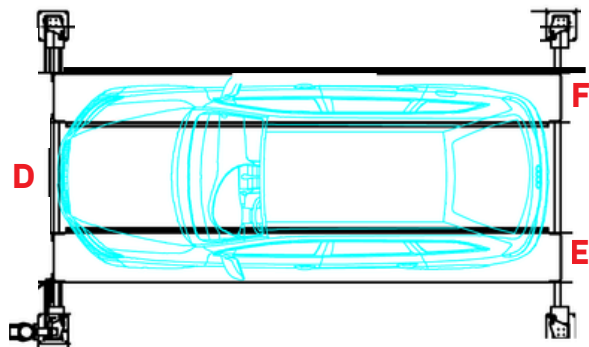

Features

- Single hydraulic lifting cylinder direct drive
- Multiple parking heights
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation and relocation
- Safety key switch controller
- Anti-skid ramp and platform
- Anti-rust smooth powder coating finish
- Enhanced anti-corrosion galvanized waving plates
- Lock release: Electrical
- 5-year warranty on parts, 1-year warranty on labor

Safety System

- 12 Full range anti-fall locks
- Limit switches
- Emergency stop button
- Anti-loosening locks

APPLICATION SCENARIOS

Vehicle Model	Sedan, SUV, regular pick-up truck
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	138 inches
Buildings	Residential or Storage
Environment	Indoor/Outdoor (Outdoor protection devices available)

Model

SAL-4PXL

Lifting Capacity 11,000 lbs

A - Overall Length 216 1/2"

B - Platform Length 210"

C - Overall Width 134"

D - Gap Width (connecting plate) 44 1/2"

E - Runway Width Left 12"

F - Runway Width Right 12"

I - Height of Post 103 1/2"

J - Inside Post to Post Width 120"

K - Outside to Outside Post 129 1/2"

N - Maximum Lifting Height 82 1/2"

Vehicle Height Up to 80 1/2"

Vehicle Width Up to 82 1/2"

Vehicle Length < 197"

Control Box Integrated modules for simple writing

Power Unit 1.2 kW Hydraulic

Electrical Requirements 120V, 1 phase

***Most parameters can be customized based on your requirements**