
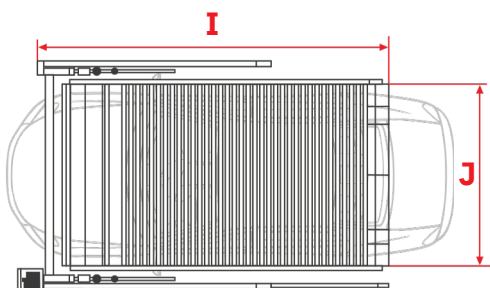
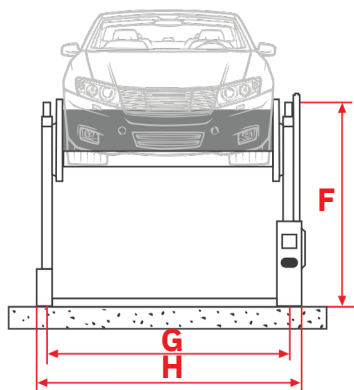


SAL-2PS

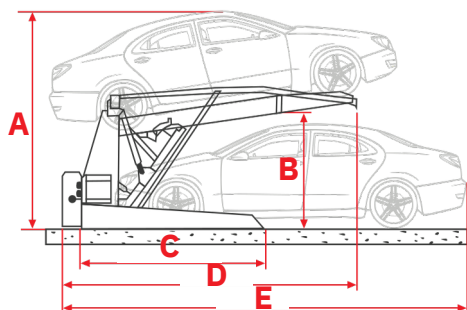

Features

- Tilting design
- Faster lifting speed than other 2-post lifts
- 100% Laser cutting process for all parts and the whole structure
- Preassembled parts for easy installation
- Safety key switch controller
- Anti-rust smooth powder coating finishing
- Enhanced anti-corrosion galvanized waving plates
- Suitable for low ceiling height and narrow space
- 5-year warranty on parts, 1-year warranty on labor

Safety System

Anti-fall hooks
Limit switches
Emergency stop button
Photocell sensor

APPLICATION SCENARIOS	
Vehicle Model	Sedan
Foundation	C25-C30, thickness > minimum 4 Inches, suggested 6 Inches
Ceiling Height	Minimum 114 1/4 Inches
Buildings	Residential or Storage
Environment	Indoor

Model	SAL-2PS
Lifting Capacity	4,410 lbs
A - Overall Height	118"
B - Platform Height	64"
C - Base Length	103"
D - Ramp Length	162"
E - Max Length	221"
F - Post Height	73"
G - Base Width	90"
H - Max Width	98"
I - Overall Length	163"
J - Overall Width	77"
Vehicle Height	Up to 64"
Vehicle Width	79"
Vehicle Length	197"
Control Box	Integrated modules for simple wiring
Power Unit	2.2 kW Hydraulic
Electrical Requirements	120V, 1 phase
Parking Time	45-55 seconds
Most parameters can be customized based on your requirements.	